



LED recessed light suitable for all common ceiling systems (exception Clip K3). Frameless and jointless light cover with a glass diffuser and white edge.

Design with high-efficiency LED modules and lighting technology. Ideal for use in rooms with low ceilings and reduced light levels.

Glass cover with evenly illuminated glass diffuser (bAG) or with additional internal microprism diffuser for use with computer screens (bMPS).

Seamless closed-cell seal between housing and cover.
Insection by opening retaining knob.


Type	Lighting system (bAG)	Approx. size L x W x H*
LP 625 (600) LED-H 4.5	LED 840, 4640 Lm, ca. 32W	625x625x95mm (600x600x95)
LP 625 (600) LED-H 6.5	LED 840, 6500 Lm, ca. 45W	625x625x95mm (600x600x95)
LP 1200x300 LED-H 6.0	LED 840, 6300 Lm, ca. 50W	1200x300x95mm

*plus cable connection


Technical Data:

- Voltage: 220-240 V / 50-60 Hz
- Protection class: 1
- Protection rating: IP65, IP50 on back side
- Control unit: switchable, optional DALI dimmer
- Elec. connection: internal 3-pin plug (DALI 5-pin) with straight wiring option
- Colour: RAL 9016 / customer choice
- Glass: toughened safety glass (bAG type)

Light distribution curve (bAG):

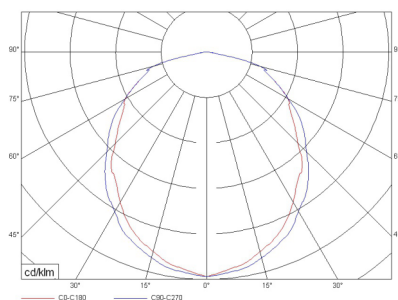

Scale diagram:

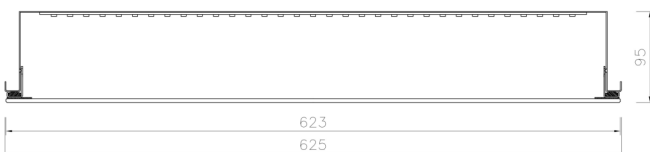

Options:

- emergency light
- elec. connection according to customer requirement
- operable from above (TOP type)

Glass

- microprismatic for use with computer screens (bMPS type)
- Cover glass with black edge