
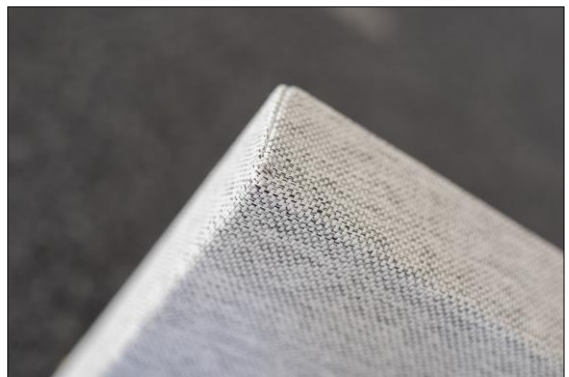


MUTE+ cover S60

Sound absorber made of aluminium frame with fabric cover, square, 60 mm

The special feature of the sound absorber MUTE+ cover: the core of the sound absorber consists of a high-quality frame made of invisible aluminium profiles. Fabrics with different structures, materials and colours are fitted over the edge using a patented process to create clearly defined 90° corners. In addition to individual dimensions, you can also creatively design the fabrics on request.

- free of mineral fibre, suitable for people suffering from allergies
- tested for harmful substances according to Oeko-Tex® standard 100
- recyclable
- installation on ceilings or partitions in interiors
- sound absorption class: A
- 90° corners
- massive core made of aluminium profiles
- many different colours and fabrics available
- individual sizes possible

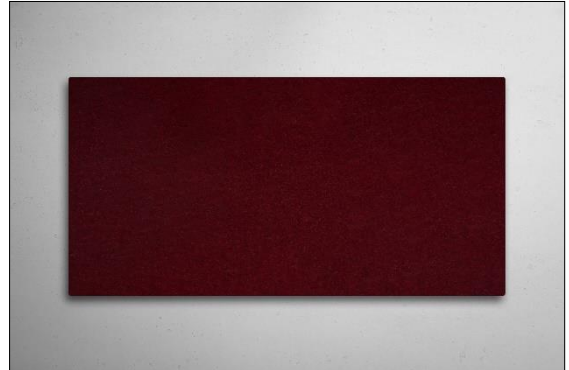

Technical data

Shape	rectangular	
Standard dimensions	Length (L)	1,000 mm, 1,500 mm, 2,000 mm
	Width (B)	1,000 mm
Individual dimensions	Length (L)	300 - 3,500 mm
	Width (B)	300 - 1,200 mm
Height	60 mm	
Corner	90°	
Material	polyester, wool	
Weight	approx. 9 kg/m ²	
Serviceability	removable without tools	

Fire protection


Building material class

Building material class polyester	DIN 4102	B1
Building material class wool	DIN 4102	B2


Notice: Building material class A2 possible on request

Details

Ceilings



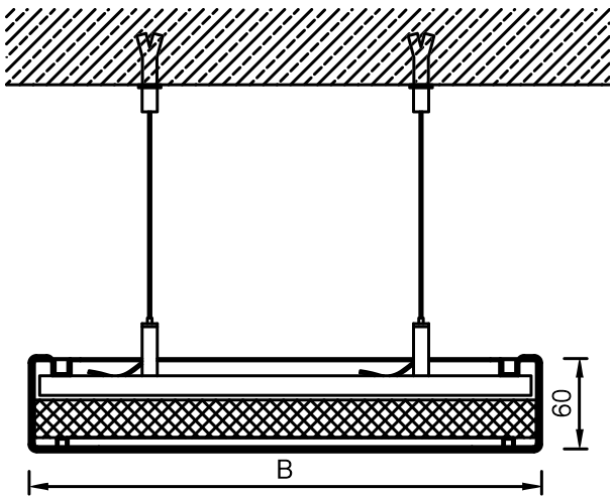






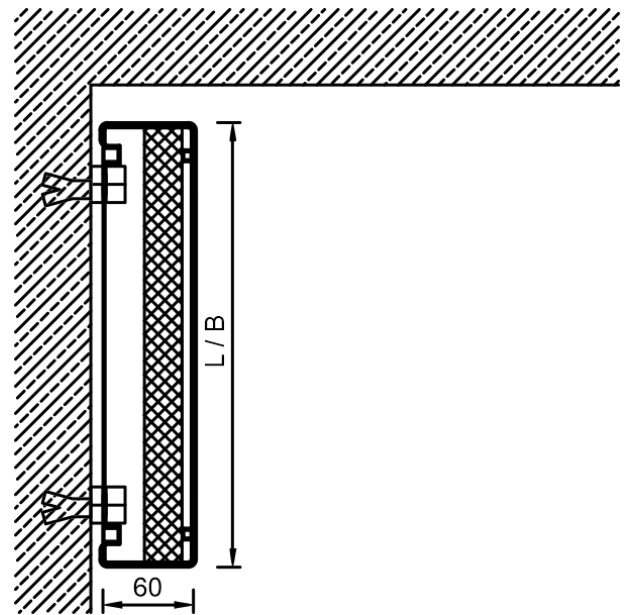





Partitions

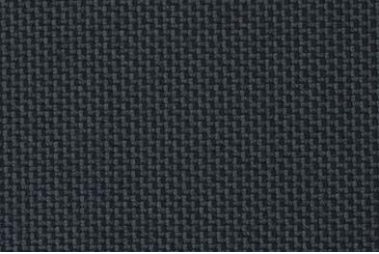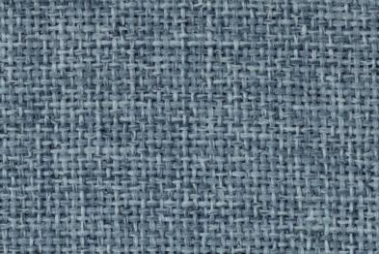

Surfaces

Fabrics

			<p>Material Polyester</p> <p>Light fastness Grade 5-6 acc. to DIN EN ISO 105-B02</p> <p>Rub fastness Grade 4-5 acc. to DIN EN ISO 105-X12</p>
<p>tex197</p>	<p>tex129</p> 	<p>tex192</p> 	
			<p>Material Polyester</p> <p>Light fastness Grade 4 acc. to DIN EN ISO 105-B02</p> <p>Rub fastness Grade 3-4 acc. to DIN EN ISO 105-X12</p>
<p>tex231</p>	<p>tex200</p> 	<p>tex237</p> 	
			<p>Material Polyester</p> <p>Light fastness Grade 5-6 acc. to DIN EN ISO 105-B02</p> <p>Rub fastness Grade 4 acc. to DIN EN ISO 105-X12</p>
<p>tex362</p>	<p>tex322</p> 	<p>tex359</p> 	
			<p>Material Wool</p> <p>Light fastness Grade 5-6 acc. to DIN EN ISO 105-B02</p> <p>Rub fastness Grade 4-5 acc. to DIN EN ISO 105-X12</p>
<p>tex466</p>	<p>tex414</p> 	<p>tex460</p> 	

Notice: The representation of colours and structures is not binding, as brightness and contrast may vary depending on the monitor and print. Differences are therefore possible. Further fabrics are available on request.

Applications



Fabric tex466




Fabric tex466




Fabric tex362



Fabric tex362

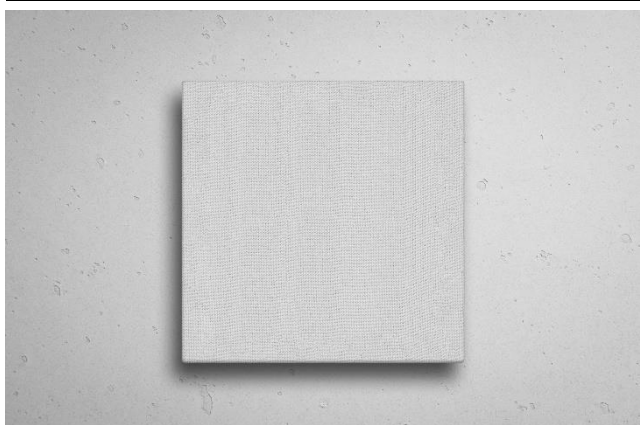

Fabric tex359

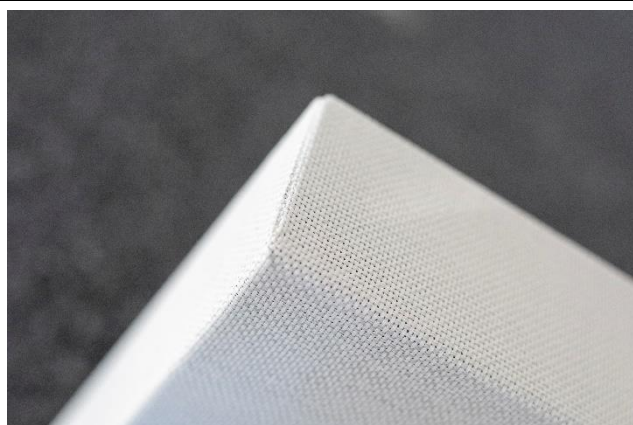

Fabric tex359

Project solutions

This product data sheet refers to the standard version of the product mentioned above.

We would be happy to work with you to find the right solution for your project. Adapted to your building project, you will receive a perfectly matched system. Project-specific constructions and adaptations can be found in the offer documents.