

# METAL CEILING SYSTEM – LMD-B

## SELF-DECLARATION ACC. TO DIN EN ISO 14021

**Holder of the declaration:** Lindner AG | Bahnhofstraße 29 | 94424 Arnstorf | Germany

**Content of the declaration:** Product information  
Certification system DGNB  
Certification system LEED  
Certification system BREEAM  
Product Certification Cradle to Cradle®

## PRODUCT INFORMATION

### Green Building Statement

We already think in closed loops while developing our products. In this context we act as one of the specialists within the range of sustainable building since many years. Supported by our internal technical department „Green Building“, we ensure the sustainability target of your building projects.

### Product description

#### LMD-B Metal Post Cap Ceiling

Metal ceiling system in closed version that offers installation space for service and disposal lines with its whole surface. The modular construction allows access to the ceiling void for maintenance works.

The substructure of the non-bearing metal ceiling panels is directly suspended from the raw ceiling or directly installed at it. The visible post cap profiles can be used for the installation of partitions.

The turn-up heights differ depending on the panel sizes. The metal ceiling panels lie with their short sides on the post cap profiles. They can be removed individually.

The post cap profiles are available in different widths / executions and can be installed in linear, cross or radial arrangement. Excellent functionality, easy maintenance, sound absorption and non-inflammable materials are important characteristics.

### Application area

For the application inside of buildings with high architectural as well as technical requirements.

### Base materials

Base materials per m <sup>2</sup> /unit = 7.0 kg*		
System components	Material	Weight proportions (%)
Metal ceiling panel	Galvanised steel sheet	~ 70.0
	Stainless steel* <sup>1</sup>	~ 70.0
Visible and hidden substructure	Galvanised steel sheet	~ 27
Powder coating of visible substructure and metal ceiling panel	Polyester powder	< 1.0
Acoustic tissue	Knitted fabrics area from glass fibre, polyester fibre, cellulose bounded with binder polyvinyl acetate and flame blocking salt free from halogen and grime pigment	< 1.0
Gasket strip	Polyolefin foamed material with flame protective agent and clad siliconized polyethylene foil	< 1.0

\*1) Calculation base: room size 10 x 10 m, post cap centre distance: 1,250 mm, panel width: 400 mm, panel length: 1,150 mm, post cap width: 100 mm

\*1) Stainless steel for 3D – surfaces like TOUCHdesign and TOUCHdesign Lunar

### Material explanation

#### Steel

All metal alloys whose main component is iron and whose content of carbon dioxide is between 0.02 % and 2.06 % are named steel.

More than 95% of the materials which are used in this product consist of steel.

#### Stainless Steel \*<sup>1</sup>

Alloyed or unalloyed steel with a particular degree of purity are referred to as stainless steel.

**CERTIFICATION SYSTEM DGNB**

Not listed characteristics do not apply to this product.

 **Environmental Quality**

**ENV 1.1 Life Cycle Assessment of the Building**

A verified EPD is available and can be taken to show the ecological balance sheet data.

Declaration number: EPD-LIN-20180192-IBC1-EN

A project-specific EPD can be produced in accordance with the valid standards.

Additional time and costs have to be considered.

**ENV 1.2 Local Environment Impact**

Components	VOC	GISCODE	Other
Metal ceiling panel from galvanised steel sheet/ stainless steel *1	-	-	-
Visible and hidden substructure from galvanised steel sheet	-	-	without lead, quicksilver, cadmium and chrome (VI)
Surface – Powder coating of visible substructure and metal ceiling panel: polyester powder	-	Giscode BS 10 is not used for powder varnishes	without lead, quicksilver, cadmium and chrome (VI)
Acoustic tissue	-	-	-
Gasket strip	-	-	-
<b>Total</b>	<b>&lt; 5 µg/m³</b>		

\*) Test measures showed a value of 5 µg/m³ = 0.005 mg/m³ after 28 days. The evaluation limit acc. to AgBB/DIBt is 1 mg/m³.

\*1) Stainless steel for 3D – surfaces like TOUCHdesign and TOUCHdesign Lunar

„-“ for “not relevant” according to DGNB 2018

**ENV 1.3 Responsible Procurement**

The product LMD-B contains no timber-based materials. Thus, a FSC / PEFC proof is not necessary.

 **Economical Quality**

**ECO 1.1 Life Cycle Costs**

Lindner metal ceilings are manufactured to the highest international standards. Metal ceilings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 353 211, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). If used as suspended ceiling lining, no dismantling or costs for demolition incur for this product. Due to the internal return system, it is guaranteed that components are not disposed but flow into the recycling circuit.

**ECO 2.1 Flexibility and Adaptability**

Every ceiling panel can be dismantled, moved or replaced individually. Post cap profiles can be used for the installation of partitions. In connection with this ceiling lining, partitions can be moved in the centre distance of the post caps without interfering with the floor and the ceiling.

## Sociocultural & Functional Quality

### SOC 1.2 Indoor Air Quality

Lindner metal ceiling systems are made of materials that are nearly free of any emission as for example VOC and formaldehyde. Test chamber measurements according to the requirements of the quality mark Indoor Air Comfort GOLD® (e. g. AgBB measurement scheme) are available as proof.

TVOC (AgBB/DIBt) C<sub>6</sub>-C<sub>16</sub>: after 28 days < 5 µg/m<sup>3</sup>

Formaldehyde value: after 28 days < 3 µg/m<sup>3</sup>

Report no.: 392-2019-00327603\_A\_DE\_rev1

For the product a Material Health Certificate „Silver“ of the Cradle to Cradle Products Innovation Institute is available.

### SOC 1.3 Acoustic Comfort

Suspended ceilings are ideally suitable for the improvement of room acoustics. Due to perforated metal ceiling panels as well as acoustically effective inlays, sound absorption values up to 1.0 can be achieved, depending on the execution. The values are tested in a reverberation room in accordance with ISO 354 and rated in accordance with DIN EN ISO 11654.

If necessary, the room acoustics class A according to VDI 2569: 2016-02 (draft) can be complied with.

### SOC 1.4 Visual Comfort

A Lindner metal ceiling covers installations in the ceiling void without obstructing the access to it. The ceiling serves as visual highlight according to project-related demands in many different colours, perforations and shapes.

LMD-B post cap ceilings can be adapted to the building shape and incorporate axes.

## Technical Quality

### TEC 1.2 Sound Insulation

Lindner post cap ceilings can be executed as longitudinally sound reduced version. The longitudinal sound reduction is performed by heavy plating made from steel sheet, plasterboard or a plasterboard barrier in the post cap. Thus, the sound transmission to adjacent rooms is reduced.

### TEC 1.5 Cleanability

The powder-coated surfaces are easy to clean. The simple dismantling of metal ceiling panels enables an uncomplicated access to the ceiling void for maintenance works.

### TEC 1.6 Deconstruction and Disassembly

Lindner metal ceiling systems are produced in such a way that they can be installed on site with as little waste as possible. Waste that cannot be avoided on site is put into recycling processes by means of waste management facilities. Every ceiling panel can be dismantled and replaced individually and non-destructively. The substructure can as well be dismantled non-destructively.

## Process Quality

### PRO 1.5 Documentation for Facility Management

Utilisation, maintenance and care instructions are created to the usual extent and can be provided.

### PRO 2.1 Environmental Impact of Construction

The compliance with project-related requirements regarding a low-waste, low-noise and low-dust construction site as well as all measures regarding soil and ground water protection are ensured by specialised in-house departments. An appropriate verification can be produced and implemented on request by specialized personnel. Due to the delivery of finished ceiling elements that do not have to be processed on site, the product contributes to a noise-free and dust-free site. The packaging is selected project-related to produce as little waste as possible.

### PRO 2.2 Construction Quality Assurance

All documents relevant for project documentation can be provided.



**CERTIFICATION SYSTEM LEED**

Not listed credits do not apply for this product.

© 2015 U.S. Green Building Council® owned by

 **Sustainable Site**

**Construction Activity Pollution Prevention**

The compliance with project-related requirements of an ESC plan is ensured by specialised in-house departments. A complete ESC plan can be produced and implemented on request by specialised personnel.

 **Materials and Resources**

**Construction and Demolition Waste Management Planning**

Waste that cannot be avoided on site will be preferentially returned to recycling processes via waste management companies. A complete CWM plan can be issued and implemented by the specialists on request.

**Building Life Cycle Impact Reduction**

Lindner metal ceilings are manufactured to the highest international standards. Metal ceilings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 353 211, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). If used as suspended ceiling lining, no dismantling or costs for demolition incur for this product. Due to the internal return system, it is guaranteed that components are not disposed but flow into the recycling circuit.

**Building Product Disclosure and Optimization – Environmental Product Declaration**

A verified EPD is available and can be taken to show the ecological balance sheet data.

Declaration number: [EPD-LIN-20180192-IBC1-EN](#)

A project-specific EPD can be produced in accordance with the valid standards.

Additional time and costs have to be considered.

**Building Product Disclosure and Optimization – Sourcing of Raw Materials**

Components	Weight proportion (%)	Recycling content (%)		Production site
		Pre-Consumer	Post-Consumer	
Metal ceiling panel from galvanised steel sheet /stainless steel*1	~ 70.0	0	25	Arnstorf
Visible and hidden substructure from galvanised steel sheet	~ 27.0	0	25	Arnstorf
Surface – Powder coating of visible substructure and metal ceiling panel: polyester powder	< 1.0	0	0	Arnstorf
Acoustic tissue	< 1.0	39	0	
Gasket strip	< 1.0	0	0	
<b>Total</b>	<b>100</b>		<b>24.4</b>	

\*1) Stainless steel for 3D – surfaces like TOUCHdesign and TOUCHdesign Lunar

The product LMD-B contains no timber-based materials. Thus, a FSC / PEFC proof is not necessary.

**Building Product Disclosure and Optimization – Material Ingredients**

As manufacturer of products Lindner fulfils the obligations towards the EU chemical directive „REACH“ and created its own REACH declaration.

The aim of the **REACH** regulation (Registration, Evaluation and Authorization of **CH**emicals) is to capture materials produced and used in the EU and to determine and record their impact on health and environment.





## Materials and Resources

### Construction and Demolition Waste Management

The compliance with project-related requirements regarding low-waste, low-noise and low-dust site as well as measures for soil and ground water protection are ensured by specialised in-house departments. An appropriate verification can be created and implemented on request by specialised personnel. Due to the delivery of finished ceiling elements that do not have to be processed on site, the product contributes to a noise-free and dust-free site. The packaging is selected project-related to produce as little waste as possible.



## Indoor Environmental Quality

### Minimum Acoustic Performance

Lindner post cap ceilings can be executed as longitudinally sound reduced version. The longitudinal sound reduction is performed by heavy plating made from steel sheet, plasterboard or a plasterboard barrier in the post cap. Thus, the sound transmission to adjacent rooms is reduced.

### Low Emitting Materials

A TVOC value of  $< 5 \mu\text{g}/\text{m}^3$  was measured in the AgBB measurement after 28 days. The use of coating materials on site is omitted as the ceiling panels are coated in factory.

### Construction Indoor Air Quality Management Plan

The compliance with project-related requirements of an IAQ plan is ensured by specialised in-house departments. A complete IAQ plan can be produced and implemented on request by specialised personnel.

### Indoor Air Quality Assessment

Lindner metal ceiling systems are made of materials that are nearly free of any emission as for example VOC and formaldehyde. Test chamber measurements according to the requirements of the quality mark Indoor Air Comfort GOLD® (e. g. AgBB measurement scheme) are available as proof.

TVOC (AgBB/DIBt) C<sub>6</sub>-C<sub>16</sub>: after 28 days  $< 5 \mu\text{g}/\text{m}^3$

Formaldehyde value: after 28 days  $< 3 \mu\text{g}/\text{m}^3$

Report no.: 392-2019-00327603\_A\_DE\_rev1

For the product a Material Health Certificate „Silver“ of the Cradle to Cradle Products Innovation Institute is available.

### Daylight

Due to the high light reflection of approx. 82% of a white (9010 acc. to Lindner) powder-coated metal ceiling, the incident daylight is transferred to the room.

### Acoustic Performance

Suspended ceilings are ideally suitable for the improvement of room acoustics. Due to perforated metal ceiling panels as well as acoustically effective inlays, sound absorption values up to 1.0 can be achieved, depending on the execution. The values are tested in a reverberation room in accordance with ISO 354 and rated in accordance with DIN EN ISO 11654.

## CERTIFICATION SYSTEM BREEAM

Not listed characteristics do not apply for this product.



### Management

#### Man 02 Life cycle cost and service life planning

Lindner products have a long life expectancy (due to the raw materials, production processes and high production quality). Moreover, certain products can systematically be dismantled and reused after small processing (C2C). Metal ceilings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 353 211, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). If used as suspended ceiling lining, no dismantling or costs for demolition incur for this product.

#### Man 03 Responsible construction practices

All companies of the Lindner Group meet the requirements of an environmental management system. For ISO 14001, ISO 50001, SCC \*\* and OHSAS certified companies within the Lindner Group, additional specific environmental and safety objectives are defined in conjunction with the annual management review. The implementation of environmental protection and the relevant legal regulations are defined in the Lindner internal guideline "Environmental Protection".



### Health and Wellbeing

#### Hea 01 Visual comfort

Due to the high light reflection of approx. 82% of a white (9010 acc. to Lindner) powder-coated metal ceiling, the incident daylight is transferred to the room.

#### Hea 02 Indoor air quality

Lindner metal ceiling systems are made of materials that are nearly free of any emission as for example VOC and formaldehyde. Test chamber measurements according to the requirements of the quality mark Indoor Air Comfort GOLD® (e. g. AgBB measurement scheme) are available as proof.

TVOC (AgBB/DIBt) C<sub>6</sub>-C<sub>16</sub>: after 28 days < 5 µg/m<sup>3</sup>

Formaldehyde value: after 28 days < 3 µg/m<sup>3</sup>

Report no.: 392-2019-00327603\_A\_DE\_rev1

For the product a Material Health Certificate „Silver“ of the Cradle to Cradle Products Innovation Institute is available.

#### Hea 05 Acoustic performance

Suspended ceilings are ideally suitable for the improvement of room acoustics. Due to perforated metal ceiling panels as well as acoustically effective inlays, sound absorption values up to 1.0 can be achieved, depending on the execution. The values are tested in a reverberation room in accordance with ISO 354 and rated in accordance with DIN EN ISO 11654.

#### Hea 18 Volatile organic compounds (In-Use only)

Lindner metal ceiling systems are made of materials that are nearly free of any emission as for example VOC and formaldehyde. Test chamber measurements according to the requirements of the quality mark Indoor Air Comfort GOLD® (e. g. AgBB measurement scheme) are available as proof.

TVOC (AgBB/DIBt) C<sub>6</sub>-C<sub>16</sub>: after 28 days < 5 µg/m<sup>3</sup>

Report no.: 392-2019-00327603\_A\_DE\_rev1



### Materials

#### Mat 01 Life cycle impacts

We can provide product-specific data for the assessment of the building. Due to the long-life cycle of ceiling systems, Lindner guarantees a reuse of products over the whole useful life.

## Materials

### **Mat 03 Responsible sourcing of construction products**

Lindner metal ceiling systems are made from materials with a high recycling content. The recycling content of scrap metal of the main component steel/ stainless steel\*1 is approx. 25% (Post-Consumer), depending on the required quality of used material components. Local suppliers are preferred. The company Lindner is certified according to the environmental management system according to DIN EN ISO 14001.

### **Mat 06 Material efficiency**

Lindner metal ceiling systems have been designed to minimize processing waste during their installation. Waste that cannot be avoided on site is preferentially put into recycling processes by means of waste management facilities.

## Waste

### **Wst 01 Construction waste management**

Lindner metal ceiling systems are produced project-specific so that they can be installed on site as low-waste as possible. Waste that cannot be avoided on site will be preferentially returned to recycling processes via waste management companies.

Due to the controlled assembly in the factory, unnecessary sources of error can be avoided.

A complete CWM plan can be issued and implemented by the specialists on request.

### **Wst 06 Functional adaptability (non-residential only)**

Lindner products have a long life expectancy. Metal ceilings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 353 211, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). Moreover, certain products can systematically be dismantled and reused after small processing (C2C).

Our pursued target of a 100 % technical cycle, allows a clean separation and a complete recycling of all components.

Lindner products are designed in a way that they can be easily dismantled without any damages what enables to easy changes of the use of the building.

## Pollution

### **Pol 05 Reduction of noise pollution**

Suspended ceilings are ideally suitable for the improvement of room acoustics. Due to perforated metal ceiling panels as well as acoustically effective inlays, sound absorption values up to 1.0 can be achieved, depending on the execution. The values are tested in a reverberation room in accordance with ISO 354 and rated in accordance with DIN EN ISO 11654.






**PRODUCT CERTIFICATION CRADLE TO CRADLE®**

**Information on Cradle to Cradle®**

The LMD-B metal post cap ceiling has a Cradle to Cradle® certification TM in silver.  
 Certificate number: 4439

Due to the transfer of the Circular Economy thoughts we avoid waste, toxic substances and pollution. The 100 % technical cycle we are striving for, allows a separation of types and nearly a whole reuse of all materials.

- Protection of prospective generations and eco systems through care of natural resources
- Security by choosing high-quality and contaminant-free materials
- Safe environment for all building occupants

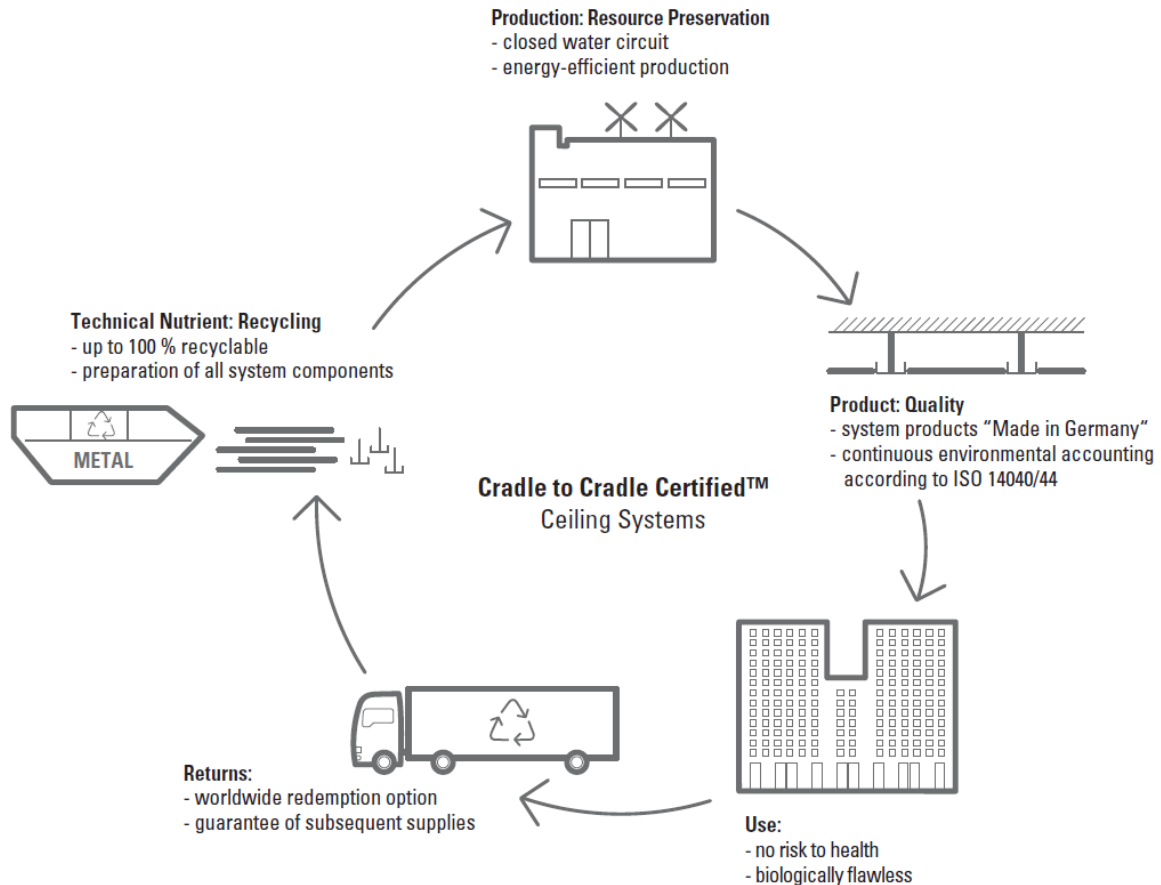



## Material Health



The parts of the LMD-B Metal Post Cap Ceiling have to be secure and highly compatible for health and environment.


Lindner develops ceiling systems which are environmentally friendly and also healthy for humans, from the production up to the usage and reuse.

We do know the chemical substances of all materials and run an ongoing process to develop safer products. To meet all criteria according to sustainability and human health, system components were modified and also replaced.

Emission tests according to national and international standards (e. g. AgBB scheme) assure low-emission and harmless materials.



## Material Reutilization



The LMD-B Metal Post Cap Ceiling is a product which can be recycled or further recovered.

By means of easy screw and hook-on systems a damage-free dismantling with subsequent reuse is possible.

At the end of the utilization phase a correctly sorted separation of all components is possible.



## Renewable Energy




Through eco-management certification and our in-house environmental accounting, the whole Lindner Group campaigns for a reduction of the ecological footprint of their own production processes by using less energy.

The share of renewable energy is currently around 37 %.

Increasing the share of renewable energy in our production sites is an ongoing process. The reduction of energy within the production sites is our main goal.



## Water Stewardship




The concept of water circulation reduces our water consumption systematically.

Due to sedimentation and cleaning of the solid matter, the process water can be pursued in a closed loop, so the fresh water consumption is reduced to a minimum.



## Social Fairness



The most important corporate principle is the focus on the individual employee. For this reason the compliance rules "Our Values" for employees were defined. The Lindner Group supports a number of social projects, which are distributed in regional and nationwide areas. Therefore, the charitable "Hans Lindner Stiftung" was founded in 1991.

As a responsible manufacturer, Lindner is certified in accordance to the international environmental management standard ISO 14001. This standard supports our further development of managing scarce resources and the environment in general.