

Partition system – Life Contour 126

Self-declaration acc. to DIN EN ISO 14021

Holder of the declaration: Lindner SE | Bahnhofstraße 29 | 94424 Arnstorf | Germany

Content of the declaration: Product information
Certification system DGNB
Certification system LEED
Certification system BREEAM
Product Certification Cradle to Cradle®

Product information

Green Building Statement

We already think in closed loops while developing our products. In this context we act as one of the specialists within the range of sustainable building for many years. Supported by our internal technical department „Green Building“, we ensure the sustainability target of your building projects.

Product description

Lindner Life Contour 126

The glass partition - Lindner Life Contour 126 is a non-bearing, flush-mounted single or double glazing system in circumferential 35mm aluminium frame. The Lindner Life Contour 126 is delivered as individual components and can be mounted easily on site.

Application area

For the application inside of buildings, e.g. offices, conference rooms, industrial workspaces as well as rooms for training and research.

Base materials

Base materials per 3,75 m² *

System components	Material	Weight proportions (%)
Tempered / laminated safety glass	Glass	~ 83,0
Glazing frame	Aluminum	~ 8,0
System stud	Glavanised steel	~ 5,0
Floor and ceiling profile	Coated steel	~ 2,7
Height adjustment bracket	Glavanised steel	< 0,5
Hook-In claws	Glavanised steel	< 0,5
Rivets	Glavanised steel	< 0,5
Stud gasket	EPDM	< 0,5
Gasket strip	PE foam tape	< 0,5
Sealing	TPE	< 0,5
Sound insulation inlay	Plastic foam	< 0,5

*) Calculation base: 3,75 m² corresponds to the standard dimensions of height x width: 3.000 mm x 1.250 mm.

Material explanation

Glass

ESG, Tempered safety glass
VSG, Laminated safety glass

Aluminum

Extruded aluminum profiles are coated (powder coated or anodized), cut and mounted as a frame with screws and corner connectors.

Steel

All metal alloys whose main component is iron and whose content of carbon dioxide is between 0,02 % and 2,06 % are named steel.

CERTIFICATION SYSTEM DGNB

Not listed characteristics do not apply to this product.



Environmental Quality

ENV 1.1 Life cycle Assessment of the Building

An ecological balance sheet is available for the production facilities and it can be provided on demand. A project-specific EPD can be produced in accordance with the valid standards. Additional time and costs have to be considered.

ENV 1.2 Local Environment Impact

Components	VOC (%)	GISCODE / Emicode	Other
Tempered / laminated safety glass	-	-	-
Glazing frame	-	Giscode BS 10 not applicable for powder coating	Without lead, mercury, cadmium and chrome (VI) compounds
System stud	-	-	Without lead, mercury, cadmium and chrome (VI) compounds
Floor and ceiling profile	-	Giscode BS 10 not applicable for powder coating	Without lead, mercury, cadmium and chrome (VI) compounds
Height adjustment bracket	-	-	Without lead, mercury, cadmium and chrome (VI) compounds
Hook-In claws	-	-	Without lead, mercury, cadmium and chrome (VI) compounds
Rivets	-	-	-
Stud gasket	-	-	-
Gasket strip	-	-	-
Sealing	-	-	-
Sound insulation inlay	-	-	-
Total			

„-“ for „not relevant“ acc. to DGNB 2018

ENV 1.3 Responsible Procurement

The product Life Contour 126 does not contain any timber, timber-based products or timber-based components.

Economical Quality

ECO 1.1 Life Cycle Costs

Non-bearing partitions can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 342 411, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development).

ECO 2.1 Flexibility and Adaptability

Life Contour 126 is a non-bearing partition which is easy to disassemble. Each glazing element can be dismantled, moved or replaced individually. Partitions can be installed at each facade axis without harming floor or ceiling. The reutilization of the partitions is possible at any time.

Sociocultural & Functional Quality

SOC 1.2 Indoor Air Quality

Due to the low TVOC value, the Lindner Life Contour 126 positively contributes to the indoor air quality.

It is many times lower than the limit value of 500 µg/m³.

TVOC (AgBB/DIBT) C₆-C₁₆: after 28 days < 5 µg/m³

Volatile aldehydes: nach 28 Tagen < 3 µg/m³

Test report no 392-2018-00188002

A Material Health Certificate "Silver" from the Cradle to Cradle Products Innovation Institute is available for the product.

SOC 1.3 Acoustic Comfort

Lindner double glazings can be equipped with acoustic elements.

SOC 1.4 Visual Comfort

The Lindner Life Contour 126 consists mostly of glass. Therefore, daylight from the facades can reach the corridor.

Technical Quality

TEC 1.2 Sound Insulation

The Lindner Life Contour 126 can be designed with a sound insulation up to R_w= 52 dB acc. to ISO 717-1.

TEC 1.6 Deconstruction and Disassembly

The Lindner Life Contour 126 can be dismantled and replaced by using usual tools. Furthermore, you can clearly separate the components in order to recycle them.

Process Quality

PRO 1.5 Documentation for Facility Management

Customary user, maintenance and care instructions are available.

PRO 2.1 Environmental Impact of Construction

The compliance with project-related requirements regarding a low-waste, low-noise and low-dust construction site as well as all measures regarding soil and ground water protection are ensured by specialised in-house departments. An appropriate verification can be produced and implemented on request by specialized personnel.

PRO 2.2 Construction Quality Assurance

All documents relevant for project documentation can be provided.



CERTIFICATION SYSTEM LEED

Not listed credits do not apply for this product.

Sustainable Site

Construction Activity Pollution Prevention

The compliance with project-related requirements of an ESC plan is ensured by specialised in-house departments. A complete ESC plan can be produced and implemented on request by specialised personnel.

Materials and Resources

Construction and Demolition Waste Management Planning

Waste that cannot be avoided on site will be preferentially returned to recycling processes via waste management companies. A complete CWM plan can be issued and implemented by the specialists on request.

Building Life Cycle Impact Reduction

Lindner partition systems have a long life expectancy. Wall claddings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 342.411, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). Moreover, certain products can systematically be dismantled and reused after small processing (C2C).

A project-specific life cycle assessment can be created for the product in compliance with the applicable standards ISO 14025, 14040, 14044 and EN 15804.

Building Product Disclosure and Optimization – Environmental Product Declaration

A project- specific EPD can be produced in accordance with the valid standards. Additional time and costs have to be considered.

Building Product Disclosure and Optimization – Sourcing of Raw Materials

Components	Gewichtsanteil (%)	Recyclinganteil (%)		Produktionsort
		Pre-Consumer	Post-Consumer	
Tempered / laminated safety glass	~ 83,0 %	20,0 %	5,0 %	Ostrov
Glazing frame	~ 8,0 %	0,0 %	30 %	Ostrov
System stud	~ 5,0 %	0,0 %	25 %	Ostrov
Floor and ceiling profile	~ 2,7 %	0,0 %	25 %	Arnstorf
Height adjustment bracket	< 0,5 %	0,0 %	0,0 %	Arnstorf
Hook-In claws	< 0,5 %	0,0 %	0,0 %	Arnstorf
Rivets	< 0,5 %	0,0 %	0,0 %	Arnstorf
Stud gasket	< 0,5 %	0,0 %	0,0 %	Arnstorf
Gasket strip	< 0,5 %	0,0 %	0,0 %	Arnstorf
Sealing	< 0,5 %	0,0 %	0,0 %	Arnstorf
Sound insulation inlay	< 0,5 %	0,0 %	0,0 %	Arnstorf
Total	~ 100 %	~ 16,8 %		

The product Life Stereo 125 does not contain any timber, timber-based products or timber-based components. FSC / PEFC certification is therefore not required.



Materials and Resources



Building Product Disclosure and Optimization – Material Ingredients

As manufacturer of products Lindner fulfils the obligations towards the EU chemical directive „REACH“ and created its own REACH declaration.

The aim of the **REACH** regulation (**R**egistration, **E**valuation and **A**uthorization of **C**hemicals) is to capture materials produced and used in the EU and to determine and record their impact on health and environment.

Construction and Demolition Waste Management

The scope of delivery only contain panels which are ready for installation and do not have to be processed on site. Therefore, the product contributes to a noise- and dust-free construction site.

Lindner system products have been designed to minimize processing waste during their installation. Waste that cannot be avoided on site is preferentially put into recycling processes by means of waste management facilities.



Indoor Environmental Quality

Minimum Acoustic Performance

The Lindner Life Contour 126 can be designed with a sound insulation up to $R_w = 52$ dB acc. to ISO 717-1 and insulates the rooms from incoming noises.

Low Emitting Materials

Due to the low TVOC value, the Lindner Life Contour 126 positively contributes to the indoor air quality.

Coating on site is not necessary.

TVOC (AgBB/DIBT) C6-C16: after 28 days < 5 $\mu\text{g}/\text{m}^3$

Volatile aldehydes: < 3 $\mu\text{g}/\text{m}^3$ T

Test report no. 392-2018-00188002

A Material Health Certificate "Silver" from the Cradle to Cradle Products Innovation Institute is available for the product.

Construction Indoor Air Quality Management Plan

The compliance with project-related requirements of an IAQ plan is ensured by specialised in-house departments. A complete IAQ plan can be produced and implemented on request by specialised personnel.

Indoor Air Quality Assessment

Lindner partition systems are made from materials that show almost no emissions of e.g. VOC and formaldehyde.

TVOC (AgBB/DIBT) C6-C16: after 28 days < 5 $\mu\text{g}/\text{m}^3$

Volatile aldehydes: < 3 $\mu\text{g}/\text{m}^3$

Test report no. 392-2018-00188002

A Material Health Certificate "Silver" from the Cradle to Cradle Products Innovation Institute is available for the product.

Daylight

The Lindner Life Contour 126 consists mostly of glass. Therefore, daylight from the facades can reach the corridor.

Acoustic Performance

The Lindner Life Contour 126 can be designed with a sound insulation up to $R_w = 52$ dB acc. to ISO 717-1.

Lindner double glazings can be combined with acoustic elements. Depending on the design, sound absorption values up to 1.0 are possible. The values have been tested in the reverberation room acc. to ISO 354 and have been scored acc. to DIN EN ISO 11654.

CERTIFICATION SYSTEM BREEAM

Notlisted characteristics do not apply for this product.



Management

Man 02 Life cycle cost and service life planning

Lindner partition systems have a long life expectancy. Wall claddings can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 342.411, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). Moreover, certain products can systematically be dismantled and reused after small processing (C2C).

A project-specific life cycle assessment can be created for the product in compliance with the applicable standards ISO 14025, 14040, 14044 and EN 15804.

Additional time and costs may have to be taken into account for this.

Man 03 Responsible construction practices

All companies of the Lindner Group meet the requirements of an environmental management system.

For ISO 14001, ISO 50001, SCC ** and OHSAS certified companies within the Lindner Group, additional specific environmental and safety objectives are defined in conjunction with the annual management review.

The implementation of environmental protection and the relevant legal regulations are defined in the Lindner internal guideline "Environmental Protection".



Health and Wellbeing

Hea 01 Visual comfort

The Lindner Life Contour 126 consists mostly of glass. Therefore, daylight from the facades can reach the corridor.

Hea 02 Indoor air quality

Lindner partition systems are made from materials that show almost no emissions of e.g. VOC and formaldehyde.

TVOC (AgBB/DIBT) C6-C16: after 28 days < 5 µg/m

Volatile aldehydes: < 3 µg/m³

Test report no. 392-2018-00188002

A Material Health Certificate "Silver" from the Cradle to Cradle Products Innovation Institute is available for the product.

Hea 05 Acoustic performance

The Lindner Life Contour 126 can be designed with a sound insulation up to $R_w = 52$ dB acc. to ISO 717-1.

Lindner double glazings can be combined with acoustic elements. Depending on the design, sound absorption values up to 1.0 are possible. The values have been tested in the reverberation room acc. to ISO 354 and have been scored acc. to DIN EN ISO 11654.

Hea 18 Volatile organic compounds (In-Use only)

Lindner partition systems are made from materials that show almost no emissions of e.g. VOC and formaldehyde.

Test chamber measurements according to the AgBB test method are available as proof.

Test report no 392-2018-00188002, Eurofins

Materials

Mat 01 Life cycle impacts

Material evidences and reports may be provided. A project-specific EPD can be produced in accordance with the valid standards. Additional time and costs have to be considered.

Mat 03 Responsible sourcing of construction products

Lindner partition systems are made from materials with a high recycling content. Local suppliers are preferred. The company Lindner is certified according to the environmental management system according to DIN EN ISO 14001.

Mat 06 Material efficiency

Lindner system products have been designed to minimize processing waste during their installation. Waste that cannot be avoided on site is preferentially put into recycling processes by means of waste management facilities.

Waste

Wst 01 Construction waste management

Lindner partition systems are produced project-specific so that they can be installed on site as low-waste as possible. Waste that cannot be avoided on site will be preferentially returned to recycling processes via waste management companies.

Due to the controlled assembly in the factory, unnecessary sources of error can be avoided.

A complete CWM plan can be issued and implemented by the specialists on request.

Wst 06 Functional adaptability (non-residential only)

Lindner products have a long life expectancy. Partitions can be expected to remain durable for up to 50 years (acc. to BBSR table, code no. 342.411, state 02/2017, published by the Federal Institute for Research on Building, Urban Affairs and Spatial Development). Moreover, certain products can systematically be dismantled and reused after small processing (C2C).

Our pursued target of a 100 % technical cycle, allows a clean separation and a complete recycling of all components.

Lindner products are designed in a way that they can be easily dismantled without any damages what enables to easy changes of the use of the building.

Pollution

Pol 05 Reduction of noise pollution

The Lindner Life Contour 126 can be designed with a sound insulation up to $R_w = 52$ dB acc. to ISO 717-1.

Lindner double glazings can be combined with acoustic elements. Depending on the design, sound absorption values up to 1.0 are possible. The values have been tested in the reverberation room acc. to ISO 354 and have been scored acc. to DIN EN ISO 11654.

PRODUCT CERTIFICATION CRADLE TO CRADLE®




Information on Cradle to Cradle®

The partition system Lindner Life Contour 126 has a Cradle to Cradle® certification TM in silver.
Certificate number: 5773

Due to the transfer of the Circular Economy thoughts we avoid waste, toxic substances and pollution. The 100 % technical cycle we are striving for, allows a separation of types and nearly a whole reuse of all materials.

- Protection of prospective generations and eco systems through care of natural resources
- Security by choosing high-quality and contaminant-free materials
- Safe environment for all building occupants

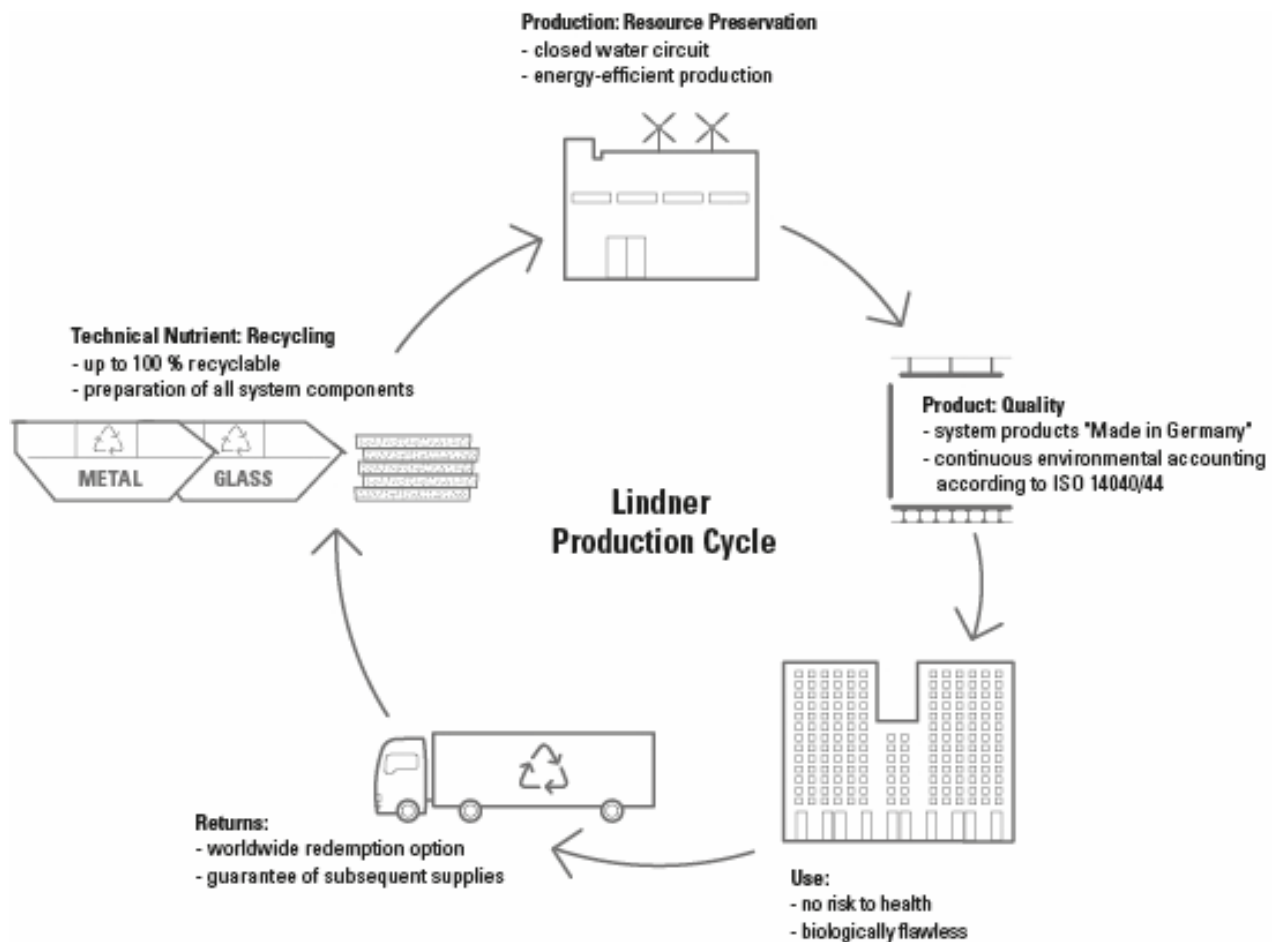



Material Health




The parts of the Lindner Life Contour 126 have to be secure and highly compatible for health and environment. Lindner develops systems which are environmentally friendly and also healthy for humans, from the production up to the usage and reuse.

We do know the chemical substances of all materials and run an ongoing process to develop safer products. To meet all criteria according to sustainability and human health, system components were modified and also replaced.

Emission tests to national- and international standards (for example AgBB-scheme) assure pollutant-free and unobjectionable materials.



Material Reutilization



The Lindner Life Contour 126 is a product which can be recycled or further recovered.

Therefore, complete components can be reused or new created, after transferring to recycling processes.

In the end of the use phase all ingredients can be sorted separately.



Renewable Energy



Through eco-management certification and our in-house environmental accounting, the whole Lindner Group campaigns for a reduction of the ecological footprint of their own production processes by using less energy. The share of renewable energy is currently around 37 %.

Increasing the share of renewable energy in our production sites is an ongoing process. The reduction of energy within the production sites is our main goal.



Water Stewardship



The concept of water circulation reduces our water consumption systematically.

Due to sedimentation and cleaning of the solid matter, the process water can be pursued in a closed loop, so the fresh water consumption is reduced to a minimum.



Social Fairness



The most important corporate principle is the focus on the individual employee. For this reason the compliance rules "Our Values" for employees were defined. The Lindner Group supports a number of social projects, which are distributed in regional and nationwide areas. Therefore, the charitable "Hans Lindner Stiftung" was founded in 1991.

As a responsible manufacturer, Lindner is certified in accordance to the international environmental management standard ISO 14001. This standard supports our further development of managing scarce resources and the environment in general.